


Print Speed

- Superior whiteness, outstanding bulk and opacity, optimum printability and FSC certified.
- Ideal medium for various printing requirements, from the top of the range to everyday use.

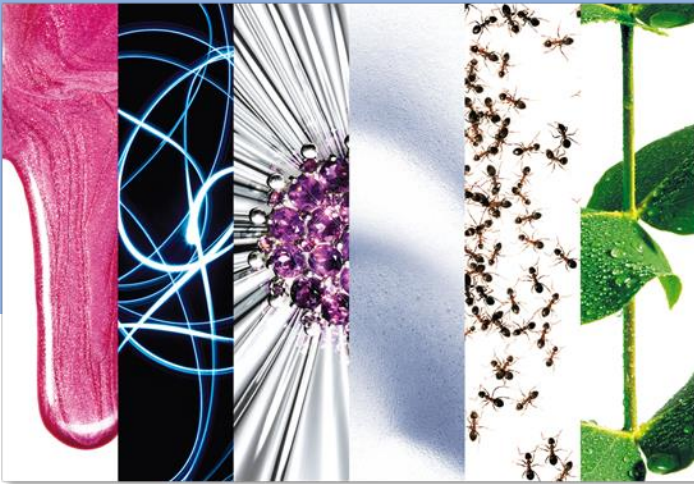

Basis weight	ISO 536	g/m ²	60	70	75	80	90	100	110	120	135	150	170	190	225	250	300	350	400
Brightness	ISO 2470	%	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110
Whiteness	ISO 11457	CIE	161	161	161	161	161	161	161	161	161	161	161	161	161	161	161	161	161
Roughness	ISO 8791-2	ml/min	150	150	180	150	150	150	150	150	150	150	200	200	200	200	200	200	200
Opacity	ISO 2471	%	87	91	92	94	95	96	97	98	98	98	99	99	99	99	99	99	99
Moisture	ISO 287	%	6,20	6,20	6,2	6,00	6,00	5,80	5,80	5,80	6,50	6,50	6,50	6,50	6,50	6,50	6,50	6,50	6,50
Bulk		cm ³ /g	1,33	1,31	1,33	1,33	1,29	1,28	1,28	1,25	1,26	1,26	1,26	1,29	1,29	1,29	1,35	1,35	1,35
Caliper	ISO 534	µm	80	92	95	106	116	128	141	150	170	185	215	240	290	320	380	438	500

These values are to be considered only as indications and are subject to change according to trade tolerances in the quality specification
Issue Date: July 2016

